



GRID SQUARE® Calcium Silicate

GridSquare® Calcium Silicate Ceilings System provides a wide range of solutions for all acoustical and desired decorative finish need from high sound absorption to high sound attenuation or a balance of both. Due to silicate content, these tiles are water and termite resistant, No Fungus & Mould Growth, light in weight. They are suitable for use in all interior application like Cinema Halls, Auditoriums, Recording Studio, Hospitals etc.



©AURA SYNERGY INDIA PVT. LTD.

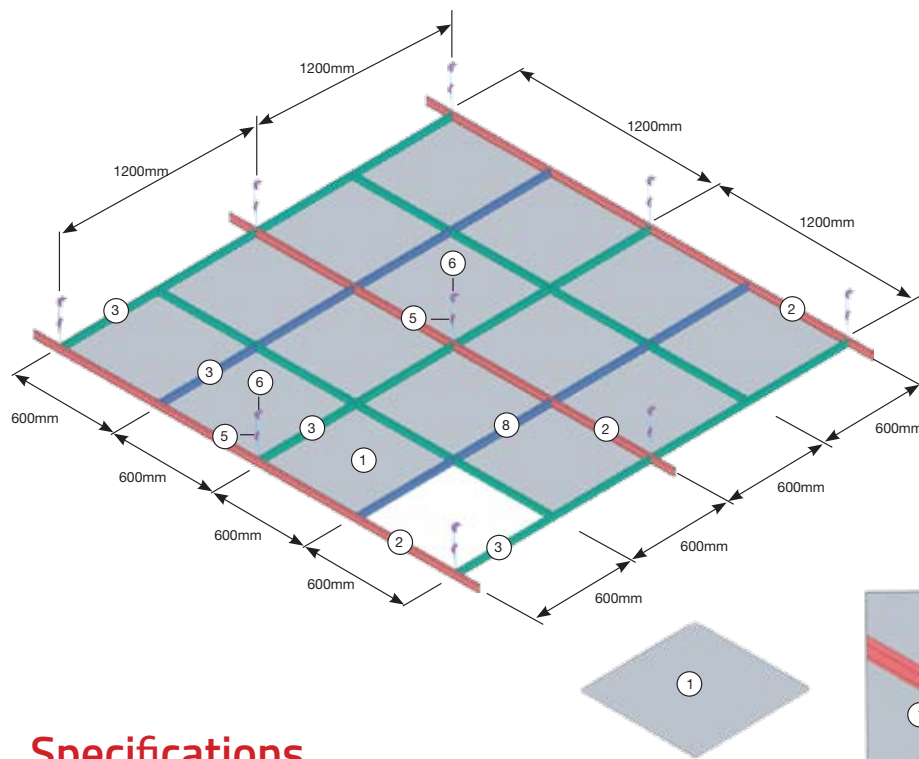

Specifications

Standard Size* Thickness

Standard Size*	Thickness
595 x 595mm	8mm & 15mm
595 x 1195mm	8mm & 15mm

* Other dimensions available on request.

Edges	: Square and Tapered /Micro-Tegular Edge
Fire resistance	: BS 476 (Part 4, 6 & 7)
Acoustic Performance	: NRC > 0.7 to 0.95
Humidity Resistance (RH)	: 100%
Density	: 900 Kg/m ³
Thermal Conductivity	: 0.15 w/m K

Advantages


- Termite Resistant
- Acoustical Absorption Capability
- Inherently Antibacterial and Antifungal

Finish



White colour
with sand textured Pin hole

Reveal Edge

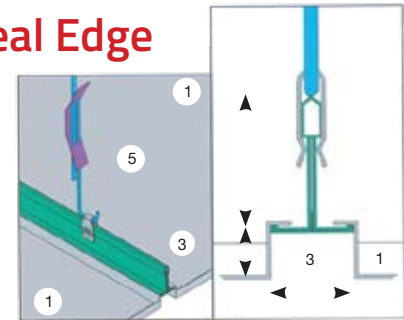


1) 595x595mm (or other modular sizes)
Mineral Fiber Normal Tee Grid System

2) Main Runner

3) 1.2m Cross Tee

4) 0.6m Cross Tee

Square Edge

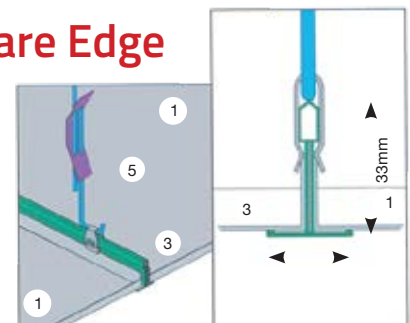

5) 4mm Rod Hanger with Adjustment Clip

6) Suspension Bracket to Soffit (steel Deck)

Included as part of GridSquare® Ceiling System