
GD SUARE® Linear System

Elegant and understated, GridSquare® Linear Metal Ceilings provide great flexibility in design that allow for a variety of visual effects. This ceiling system also comes in variable modular widths and is compatible with perforated or solid panels.



Open Gap System

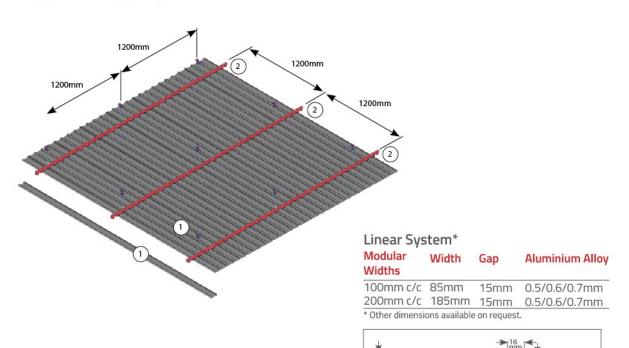

Advantages

- Easy installation and accessibility
- Suitable for a variety of design purposes

Specifications

GI precoated

Standard Type*	Width	Depth	Lenght	Thickness
84R/F	84mm	16mm	upto 6mtrs	0.5mm
84C	84mm	12.5mm	upto 6mtrs	0.5mm
150F	150mm	17mm	upto 6mtrs	0.5mm
150C	150mm	15mm	upto 6mtrs	0.5mm

^{*} Other dimensions available on request.


ALUMINIUM precoated


13mn

Standard Type	Width	Depth	Lenght	Thickness
84R/F	84mm	16mm	upto 6mtrs	0.5mm/0.6mm
84C	84mm	12.5mm	upto 6mtrs	0.5mm/0.6mm
150F	150mm	17mm	upto 6mtrs	0.5mm/0.6mm
150C	150mm	15mm	upto 6mtrs	0.5mm/0.6mm

Module 200mm

Module 100mm 84mm





1) 84R/L/F(85), 150 F/C Ceiling


2) Runner

3) Threaded Rods (Vertical Suspension)


4) Suspension Bracket to Soffit


Included as part of GridSquare® Ceiling System

Perforation Patterns









2.5mm dia

^{*} Other dimensions available on request.